




6 time selection buttons with activation indicator lights


ON/OFF Button with hold on function



◆ WIRING

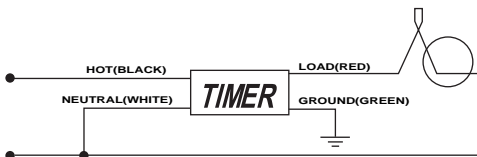

HET06-R

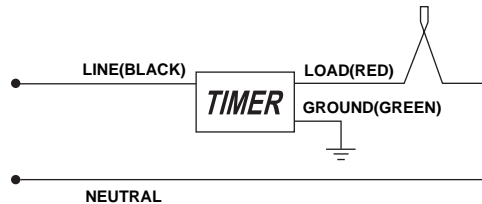

HET06-J

◆ DESCRIPTION

The HET06-R is a timer switch that turns OFF the connected light or fan when the selected time expires. The indicator light under the ON/OFF button will flash twice when the set time is out.

Manual ON

Turn ON the connected light or fan by pressing the desired time button, or the ON/OFF button. If you press the desired time button, its indicator light flashes twice to show the new countdown interval is set. If you press the ON/OFF button, two indicator lights flash twice, one is to indicate that the last used time selection was activated.

Manual OFF

While a timer is active, you can press the ON/OFF button to turn OFF the connected light or fan without delay.

Changing the selected time

If you decide that you need more or less time than you originally selected, restart the timer switch by pressing the button that matches the amount of time you think you will need.

Hold Mode(Continuous Operation)

To turn timer On for extended periods of time, press and hold the push button for more than 8 seconds. Timer enters HOLD mode, the LED for the ON/OFF button flashes twice and the connected load is turned ON. To exit HOLD mode, press and release any button of the time to turn OFF the connected load.